arXiv:1202.1048v1 [physics.flu-dyn] 6 Feb 2012

Large-scale length that could determine the mean rate of energy dissipation in turbulence

Hideaki Mouri,[a] Akihiro Hori,[b] Yoshihide Kawashima,[b] and Kosuke Hashimoto[b]
Meteorological Research Institute, Nagamine, Tsukuba 305-0052, Japan

(Dated: 7 February 2012)

The mean rate of energy dissipation $\langle \varepsilon \rangle$ in turbulence is often written in the form of $\langle \varepsilon \rangle = C_u \langle u^2 \rangle^{3/2}/L_u$, where the root-mean-square velocity fluctuation $\langle u^2 \rangle^{1/2}$ and the velocity correlation length L_u are parameters of the energy-containing large scales. However, the dimensionless coefficient C_u is known to depend on the flow configuration that is to induce the turbulence. We define the correlation length L_{u^2} of the local energy u^2, study $C_{u^2} = \langle \varepsilon \rangle L_{u^2}/\langle u^2 \rangle^{3/2}$ with experimental data of several flows, and find a possibility that C_{u^2} does not depend on the flow configuration. Not L_u but L_{u^2} could serve as the typical size of the energy-containing eddies, so that $\langle u^2 \rangle^{3/2}/L_{u^2}$ is proportional to the rate at which the kinetic energy is removed from those eddies and is eventually dissipated into heat.

I. INTRODUCTION

Since the kinetic energy of turbulence is transferred from large to small scales and is eventually dissipated into heat, the mean rate of energy dissipation per unit mass $\langle \varepsilon \rangle = \nu \sum_{i,j} \langle (\partial_{x_i} v_j + \partial_{x_j} v_i)^2 \rangle /2$ is independent of the value of the kinematic viscosity ν. The rate is instead determined by parameters of the large scales:

$$\langle \varepsilon \rangle = C \frac{\langle u^2 \rangle^{3/2}}{L}. \tag{1}$$

Here C is a dimensionless coefficient, $\langle u^2 \rangle^{1/2}$ is the root-mean-square fluctuation of the velocity component v_i in some direction x_i ($i = 1$, 2, or 3), and the length L represents the large scales or equivalently the sizes of the energy-containing eddies. The energy of such eddies is of the order of $\langle u^2 \rangle$. Their time scale is of the order of $L/\langle u^2 \rangle^{1/2}$. As a result, $\langle u^2 \rangle^{3/2}/L$ is of the order of the rate at which their energy is transferred to the smaller eddies. This rate is in turn equal to $\langle \varepsilon \rangle$.

Historically, Eq. (1) was found by Taylor[1] in 1935. Dryden[2] in 1943 and Batchelor[3] in 1953 found that Eq. (1) is not inconsistent with experimental data of grid turbulence. Thereafter, Eq. (1) has been used in various studies of turbulence, some of which were already described by Landau and Lifshitz[4] in 1959.

The length L is traditionally defined as the correlation length L_u of the turbulent velocity u,[2,3] which is based on the two-point correlation $\langle u(x+r)u(x) \rangle$:

$$L_u = \frac{\int_0^\infty \langle u(x+r)u(x) \rangle dr}{\langle u^2 \rangle}. \tag{2a}$$

However, by using experimental and numerical data of various flows, Sreenivasan[5–7] found that $C_u = \langle \varepsilon \rangle L_u / \langle u^2 \rangle^{3/2}$ depends on the flow configuration. That is, C_u is determined by the initial condition, boundary condition, external force, and so on of the turbulence. For the same flow configuration, C_u was almost a constant of order unity if the Reynolds number was high enough to separate the energy-containing large scales from the energy-dissipating small scales. These findings have been confirmed experimentally[8–11] and numerically.[12–14]

The dependence of C_u on the flow configuration implies that $\langle u^2 \rangle^{3/2}/L_u$ is not exactly proportional to the rate at which the energy is removed from the energy-containing eddies. Although $\langle u^2 \rangle$ is not proportional to the total energy $\sum_i \langle v_i^2 \rangle$ if the turbulence is not isotropic, this is not the sole reason because C_u is different even among isotropic flows.[5,7,9–13] It is hence concluded that L_u is not exactly proportional to the typical size L of the energy-containing eddies.

---

[a] Electronic mail: hmouri@mri-jma.go.jp

[b] Also at Meteorological and Environmental Sensing Technology, Inc.

TABLE I. Experimental conditions and turbulence parameters of grid turbulence G1–G5, boundary layer B1–B6, and jet J1–J6: incoming flow velocity $U_{\rm wt}$, measurement position $x_{\rm wt}$ and $z_{\rm wt}$, sampling frequency f, mean streamwise velocity U, kinematic viscosity ν, mean rate of energy dissipation $\langle \varepsilon \rangle = 15\nu \langle (\partial_x v)^2 \rangle /2$, root-mean-square velocity fluctuations $\langle u^2 \rangle^{1/2}$ and $\langle v^2 \rangle^{1/2}$, correlation lengths L_u, L_v, L_{u^2}, and L_{v^2} in Eq. (2), and Reynolds numbers $\mathrm{Re}_{\lambda_u} = \langle u^2 \rangle^{1/2} \lambda_u / \nu$ and $\mathrm{Re}_{\lambda_v} = \langle v^2 \rangle^{1/2} \lambda_v / \nu$ for $\lambda_u = [2\langle u^2 \rangle / \langle (\partial_x v)^2 \rangle]^{1/2}$ and $\lambda_v = [\langle v^2 \rangle / \langle (\partial_x v)^2 \rangle]^{1/2}$.

	$U_{\rm wt}$ m s^{-1}	$x_{\rm wt}$ m	$z_{\rm wt}$ m	f kHz	U m s^{-1}	ν cm^2 s^{-1}	$\langle \varepsilon \rangle$ m^2 s^{-3}	$\langle u^2 \rangle^{1/2}$ m s^{-1}	$\langle v^2 \rangle^{1/2}$ m s^{-1}	L_u cm	L_v cm	L_{u^2} cm	L_{v^2} cm	Re_{λ_u}	Re_{λ_v}
G1	4	+1.5	1.00	10	4.31	0.141	0.141	0.236	0.231	0.164	0.0413	0.0480	0.0244	153	104
G2	8	+1.5	1.00	24	8.57	0.142	0.975	0.475	0.463	0.170	0.0407	0.0483	0.0249	234	158
G3	12	+1.5	1.00	40	12.7	0.143	2.81	0.696	0.683	0.175	0.0446	0.0490	0.0237	296	202
G4	16	+2.0	1.00	54	16.9	0.143	4.42	0.862	0.837	0.182	0.0455	0.0535	0.0265	362	241
G5	20	+2.0	1.00	70	21.2	0.142	7.98	1.10	1.06	0.179	0.0469	0.0560	0.0265	436	290
B1	2	+12.5	0.35	4	1.55	0.140	0.0367	0.290	0.239	0.481	0.0672	0.217	0.0844	455	218
B2	4	+12.5	0.35	10	3.12	0.138	0.244	0.552	0.464	0.490	0.0694	0.214	0.0808	643	321
B3	8	+12.5	0.30	26	5.93	0.143	2.05	1.18	0.975	0.424	0.0614	0.181	0.0711	993	480
B4	12	+12.5	0.30	44	9.09	0.142	5.21	1.71	1.42	0.433	0.0604	0.203	0.0756	1325	641
B5	16	+12.5	0.25	60	11.3	0.143	12.6	2.37	1.96	0.430	0.0568	0.178	0.0718	1621	780
B6	20	+12.5	0.25	70	13.5	0.142	19.1	2.99	2.47	0.410	0.0605	0.170	0.0690	2097	1017
J1	4	+15.5	0.45	6	2.83	0.141	0.0519	0.396	0.336	1.46	0.112	0.290	0.137	709	362
J2	8	+15.5	0.40	16	5.59	0.139	0.379	0.743	0.661	1.30	0.103	0.263	0.126	932	522
J3	16	+15.5	0.40	44	11.5	0.139	2.60	1.56	1.36	1.28	0.102	0.272	0.125	1559	837
J4	24	+15.5	0.40	70	17.4	0.139	7.52	2.34	2.06	1.24	0.102	0.275	0.127	2074	1133
J5	33	+15.5	0.40	90	22.9	0.139	15.4	3.08	2.71	1.28	0.105	0.277	0.138	2505	1375
J6	41	+15.5	0.40	110	27.7	0.141	23.0	3.93	3.36	1.21	0.104	0.269	0.129	3315	1715

This conclusion is important because L_u has been used as a representative of the large scales, not only in the study of Eq. (1) but also in many other studies. It is desirable to explore a more suitable definition of L. Pearson *et al.*[9] defined L as a scale that corresponds to the peak of the so-called premultiplied energy spectrum, but their definition has turned out to retain the dependence of C on the flow configuration.[10] We instead define L as the correlation length L_{u^2} of the local energy u^2:

$$L_{u^2} = \frac{\int_0^\infty \langle [u^2(x+r) - \langle u^2 \rangle][u^2(x) - \langle u^2 \rangle] \rangle \, dr}{\langle (u^2 - \langle u^2 \rangle)^2 \rangle}. \tag{2b}$$

The expectation is that the fluctuations of u^2 represented by L_{u^2} could be related to the energy-containing eddies, which are defined to possess the mean energy $\langle u^2 \rangle$. By using experimental data of several flows of fully developed turbulence, $C_{u^2} = \langle \varepsilon \rangle L_{u^2} / \langle u^2 \rangle^{3/2}$ is studied over a range of the Reynolds number.

II. EXPERIMENTAL DATA

The experimental data used here are those of the longitudinal velocity u and the lateral velocity v in grid turbulence (G1–G5), boundary layer (B1–B6), and jet (J1–J6), among each of which the flow configuration was the same but the Reynolds number spans some range. While B1, B4, B6, J1, and J6 are used here for the first time, the others were used in our past works.[15,16] The experimental conditions and turbulence parameters are summarized in Table I.

Especially in an estimation of $\langle \varepsilon \rangle$, uncertainties are unavoidable.[8,10] To avoid any of the resulting bias, the data were obtained and processed in the same manner. The details are described below. For the reader not interested in them, we suggest to skip to Sec. III.

A. Experiments

The experiments were conducted in a wind tunnel of the Meteorological Research Institute. We adopt coordinates $x_{\rm wt}$, $y_{\rm wt}$, and $z_{\rm wt}$ in the streamwise, spanwise, and floor-normal directions. The corresponding flow velocities are $U + u$, v, and w. Here U is the average while u, v, and w are the fluctuations. The origin

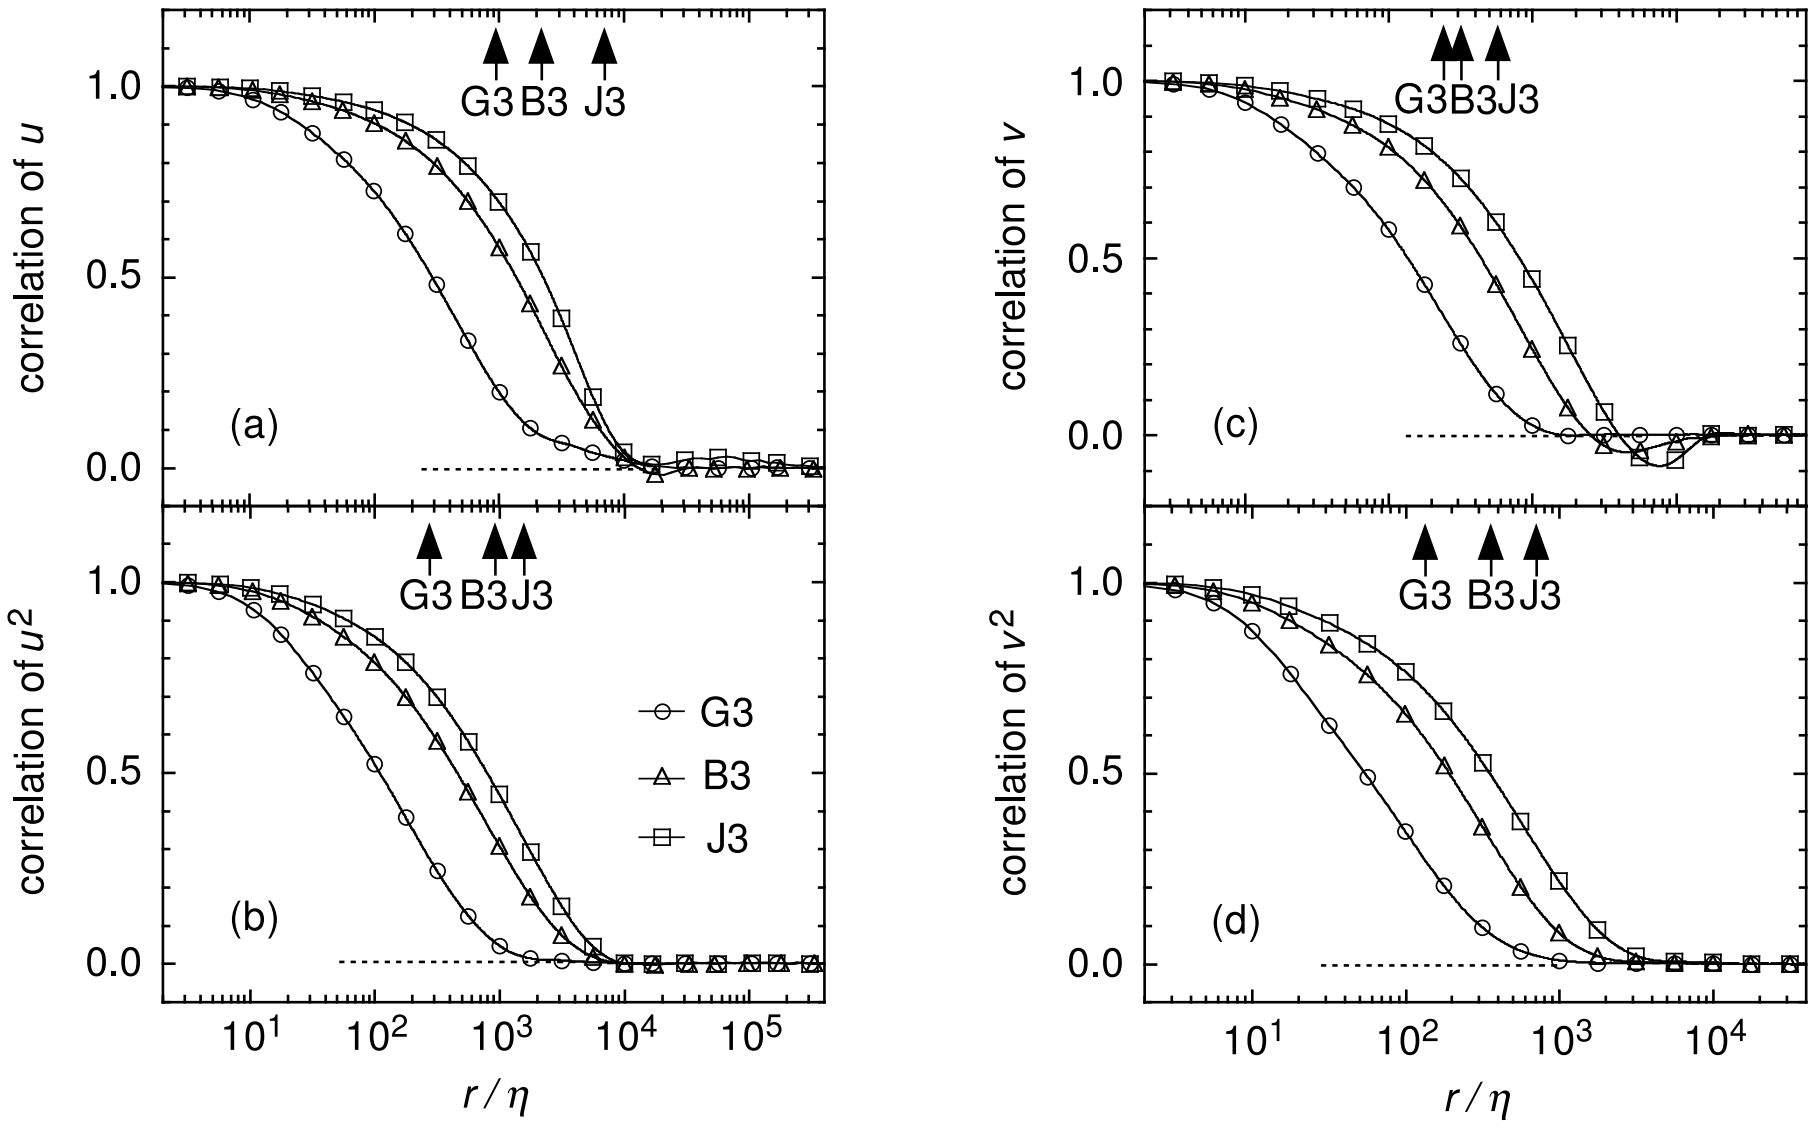

FIG. 1. Two-point correlations of u, u^2, v, and v^2 as a function of scale r in grid turbulence G3 (circles), boundary layer B3 (triangles), and jet J3 (squares). While the scale r is normalized by the Kolmogorov length η, the correlations are normalized by their values at $r = 0$. The arrows indicate L_u, L_{u^2}, L_v, or L_{v^2}.

$x_{\mathrm{wt}} = y_{\mathrm{wt}} = z_{\mathrm{wt}} = 0\,\mathrm{m}$ is on the floor center at the upstream end of the test section of the tunnel. Its size was $\delta x_{\mathrm{wt}} = 18\,\mathrm{m}$, $\delta y_{\mathrm{wt}} = 3\,\mathrm{m}$, and $\delta z_{\mathrm{wt}} = 2\,\mathrm{m}$. The cross section $\delta y_{\mathrm{wt}} \times \delta z_{\mathrm{wt}}$ was the same upstream to $x_{\mathrm{wt}} = -4\,\mathrm{m}$.

To measure $U + u$ and v, we used a hot-wire anemometer. The anemometer was composed of a constant temperature system and a crossed-wire probe. The wires were made of platinum-plated tungsten, $5\,\mu\mathrm{m}$ in diameter, 1.25 mm in sensing length, 1 mm in separation, oriented at ±45° to the streamwise direction, and 280 °C in temperature. Although the spatial resolution of our probe was not high, this is not serious as demonstrated in Appendix.

For the grid turbulence G1–G5, we set a grid at $x_{\mathrm{wt}} = -2\,\mathrm{m}$ across the flow passage to the test section of the wind tunnel. The grid had two layers of square rods, with axes in the two layers at right angles. The cross section of the rod was $0.04 \times 0.04\,\mathrm{m}^2$. The spacing of the rod axes was 0.20 m. We set the velocity of the incoming flow to be $U_{\mathrm{wt}} = 4$–$20\,\mathrm{m\,s^{-1}}$. The measurement was on the tunnel axis, $y_{\mathrm{wt}} = 0\,\mathrm{m}$ and $z_{\mathrm{wt}} = 1.00\,\mathrm{m}$.

For the boundary layer B1–B6, roughness blocks were set over the entire floor of the test section. The block size was $\delta x_{\mathrm{wt}} = 0.06\,\mathrm{m}$, $\delta y_{\mathrm{wt}} = 0.21\,\mathrm{m}$, and $\delta z_{\mathrm{wt}} = 0.11\,\mathrm{m}$. The spacing of the block centers was $\delta x_{\mathrm{wt}} = \delta y_{\mathrm{wt}} = 0.50\,\mathrm{m}$. We set the velocity of the incoming flow to be $U_{\mathrm{wt}} = 2$–$20\,\mathrm{m\,s^{-1}}$. The measurement was in the log-law sublayer at $x_{\mathrm{wt}} = +12.5\,\mathrm{m}$ and $y_{\mathrm{wt}} = 0\,\mathrm{m}$, where the boundary layer had the displacement thickness of 0.2 m and the 99% velocity thickness of 0.8 m.

For the jet J1–J6, we set a contraction nozzle. Its exit at $x_{\mathrm{wt}} = -2\,\mathrm{m}$ was rectangular with the size of $\delta y_{\mathrm{wt}} = 2.1\,\mathrm{m}$ and $\delta z_{\mathrm{wt}} = 1.4\,\mathrm{m}$. The center was on the tunnel axis. We set the flow velocity at the nozzle exit to be $U_{\mathrm{wt}} = 4$–$41\,\mathrm{m\,s^{-1}}$. The measurement was at $x_{\mathrm{wt}} = +15.5\,\mathrm{m}$ and $y_{\mathrm{wt}} = 0\,\mathrm{m}$.

The signal of the anemometer was linearized, low-pass filtered, and then digitally sampled. We determined the sampling frequency f as high as possible, on the condition that high-frequency noise was not significant in the energy spectrum. The filter cutoff was at $f/2$. We obtained a long record of 1×10^8 data for $f \le 20\,\mathrm{kHz}$ or of 4×10^8 data for $f > 20\,\mathrm{kHz}$. Since the variation of air temperature was ±1 °C at most, the kinematic viscosity ν was assumed to have been constant.

B. Data processing

The temporal fluctuations $u(t_{\mathrm{wt}})$ and $v(t_{\mathrm{wt}})$ along time t_{wt} were converted into spatial fluctuations of the longitudinal velocity $u(x)$ and the lateral velocity $v(x)$ along position x by using Taylor's hypothesis, $x = -Ut_{\mathrm{wt}}$. Hereafter, the average $\langle \cdot \rangle$ is taken over the position x.

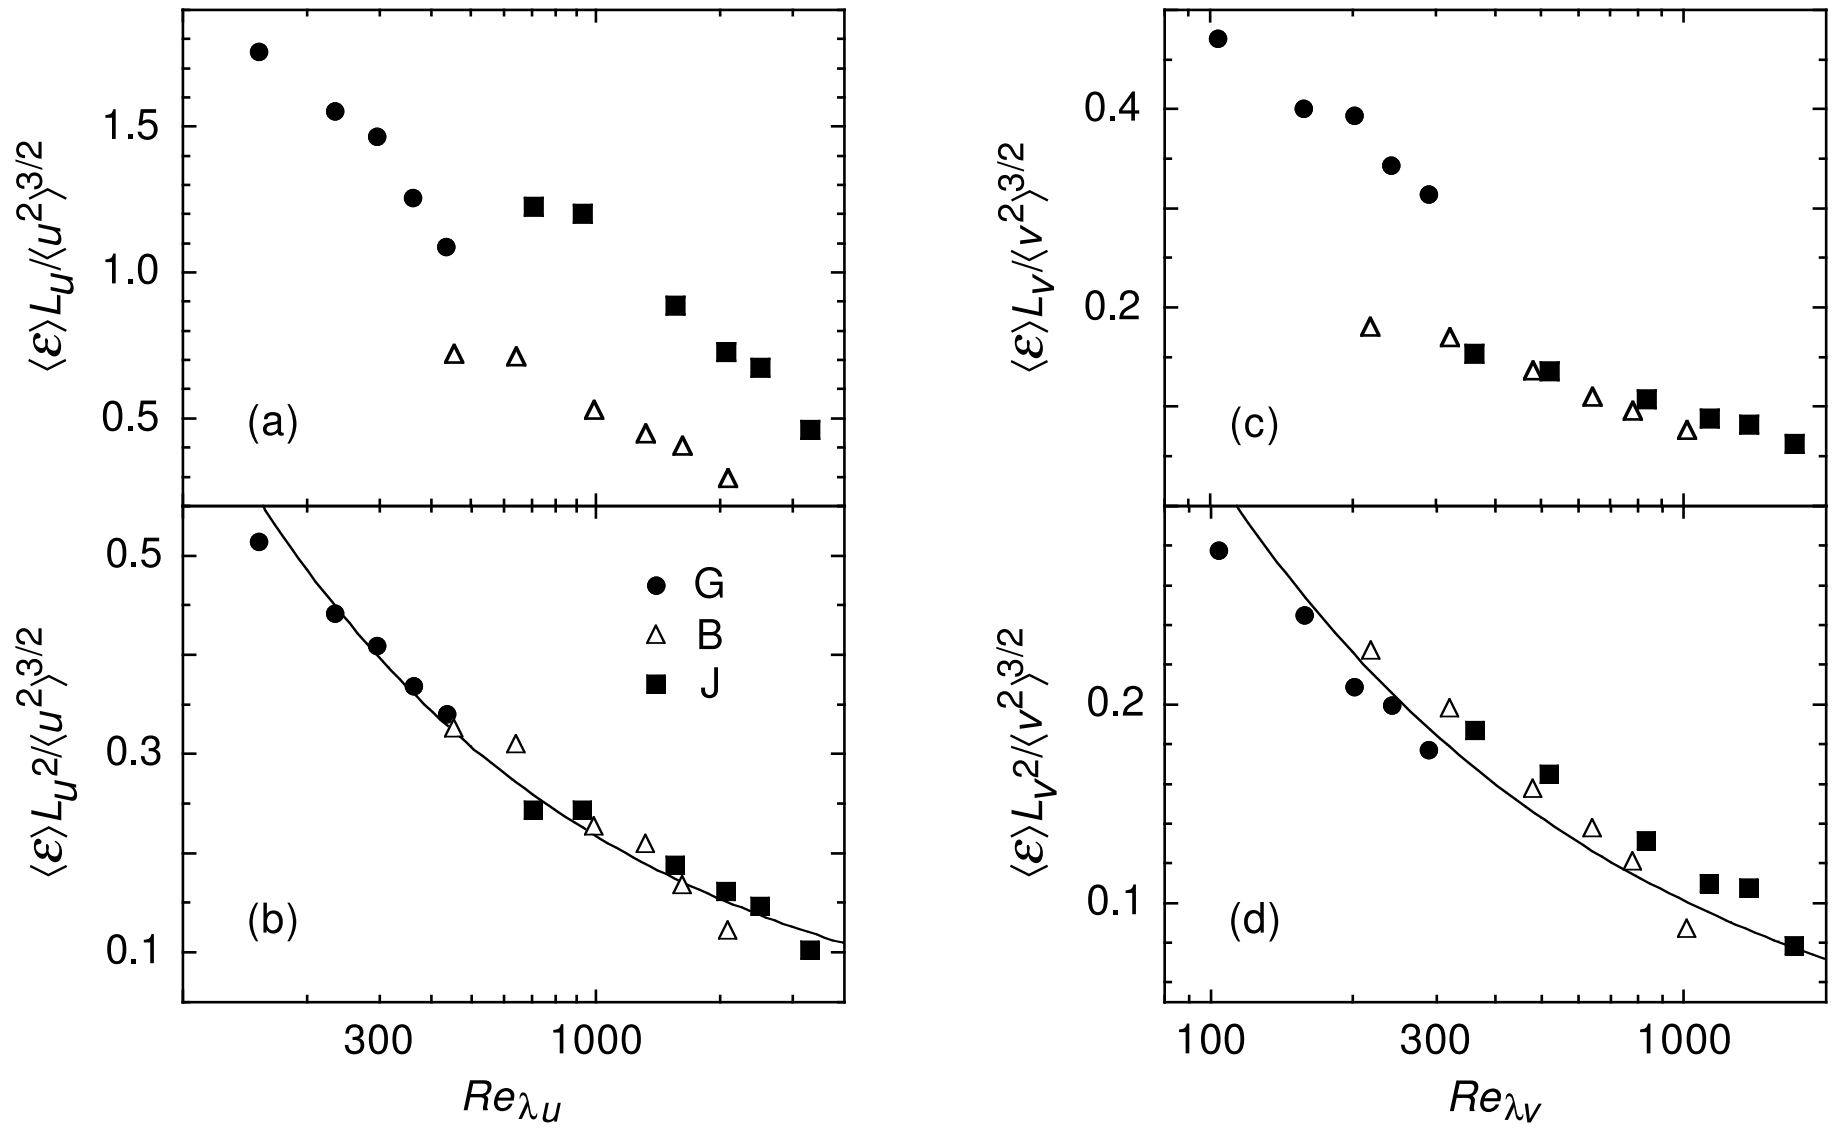

FIG. 2. Dimensionless coefficients $C_u = \langle\varepsilon\rangle L_u/\langle u^2\rangle^{3/2}$ and $C_{u^2} = \langle\varepsilon\rangle L_{u^2}/\langle u^2\rangle^{3/2}$ as a function of Re_{λ_u} and $C_v = \langle\varepsilon\rangle L_v/\langle v^2\rangle^{3/2}$ and $C_{v^2} = \langle\varepsilon\rangle L_{v^2}/\langle v^2\rangle^{3/2}$ as a function of Re_{λ_v} in grid turbulence G1–G5 (circles), boundary layer B1–B6 (triangles), and jet J1–J6 (squares). The solid curve is a fit for $C_{u^2} \propto \mathrm{Re}_{\lambda_u}^{-1/2}$ or for $C_{v^2} \propto \mathrm{Re}_{\lambda_v}^{-1/2}$.

The mean rate of energy dissipation $\langle\varepsilon\rangle$ was calculated as $15\nu\langle(\partial_x v)^2\rangle/2$ instead of usual $15\nu\langle(\partial_x u)^2\rangle$ by assuming local isotropy, $\langle(\partial_x v)^2\rangle = 2\langle(\partial_x u)^2\rangle$. This is because the measurement of the v velocity was more reliable. The two wires of the crossed-wire probe individually respond to all the u, v, and w velocities. Since the measured u velocity corresponds to the sum of the responses of the two wires, it is contaminated with the w velocity especially at smallest scales. Since the measured v velocity corresponds to the difference of the responses, it is not contaminated with the w velocity. We have ensured the local isotropy by comparing $u(x+r)-u(x)$ with $v(x+r)-v(x)$ along small r. The derivative $\partial_x v$ was estimated as $[8v(x+\delta x) - 8v(x-\delta x) - v(x+2\delta x) + v(x-2\delta x)]/12\delta x$ with the sampling interval $\delta x = U/f$. We also calculated the Reynolds number Re_λ for the Taylor microscale λ defined as $\lambda_u = [\langle u^2\rangle/\langle(\partial_x u)^2\rangle]^{1/2}$ or as $\lambda_v = [\langle v^2\rangle/\langle(\partial_x v)^2\rangle]^{1/2}$, where the local isotropy was again assumed to estimate $\langle(\partial_x u)^2\rangle$ from $\langle(\partial_x v)^2\rangle$.

The correlation lengths in Eq. (2) were calculated for both the u and v velocities. Usually, the two-point correlation is integrated only up to the scale of its first zero crossing.[6,9,10] This limit is intended to avoid statistical uncertainties at the larger scales, albeit at the expense of any information there. Since our data records are long, we integrated the two-point correlation beyond the scale of the first zero crossing. The convergence of the integration has been ascertained by changing its limit. Figures 1(a) and 1(b) show the two-point correlations $\langle u(x+r)u(x)\rangle$ and $\langle[u^2(x+r) - \langle u^2\rangle][u^2(x) - \langle u^2\rangle]\rangle$. The u^2 correlation decays faster than the u correlation. As a result, L_{u^2} is smaller than L_u (arrows). This is also the case between the v and v^2 correlations in Figs. 1(c) and 1(d), although L_{v^2} is larger than L_v in the boundary layer and jet where the v correlation is negative at large r. For the same flow configuration, each of L_u, L_v, L_{u^2}, and L_{v^2} has almost the same value.

III. RESULTS

Figure 2 shows $C_u = \langle\varepsilon\rangle L_u/\langle u^2\rangle^{3/2}$ and $C_{u^2} = \langle\varepsilon\rangle L_{u^2}/\langle u^2\rangle^{3/2}$ as a function of Re_{λ_u} and $C_v = \langle\varepsilon\rangle L_v/\langle v^2\rangle^{3/2}$ and $C_{v^2} = \langle\varepsilon\rangle L_{v^2}/\langle v^2\rangle^{3/2}$ as a function of Re_{λ_v}. While the sequences of C_u and C_v do not align among the grid turbulence, boundary layer, and jet in Figs. 2(a) and 2(c), the sequences of C_{u^2} and C_{v^2} do align in Figs. 2(b) and 2(d). There is a possibility that C_{u^2} and C_{v^2} are at least approximately independent of the flow configuration. As the typical size L of the energy-containing eddies, L_{u^2} and L_{v^2} are preferable to L_u and L_v.

The sequences of C_{u^2} in Fig. 2(b) appear to align better than those of C_{v^2} in Fig. 2(d). It might follow that L_{u^2} is preferable to L_{v^2}, but any conclusion awaits studies of turbulence that is much more anisotropic.

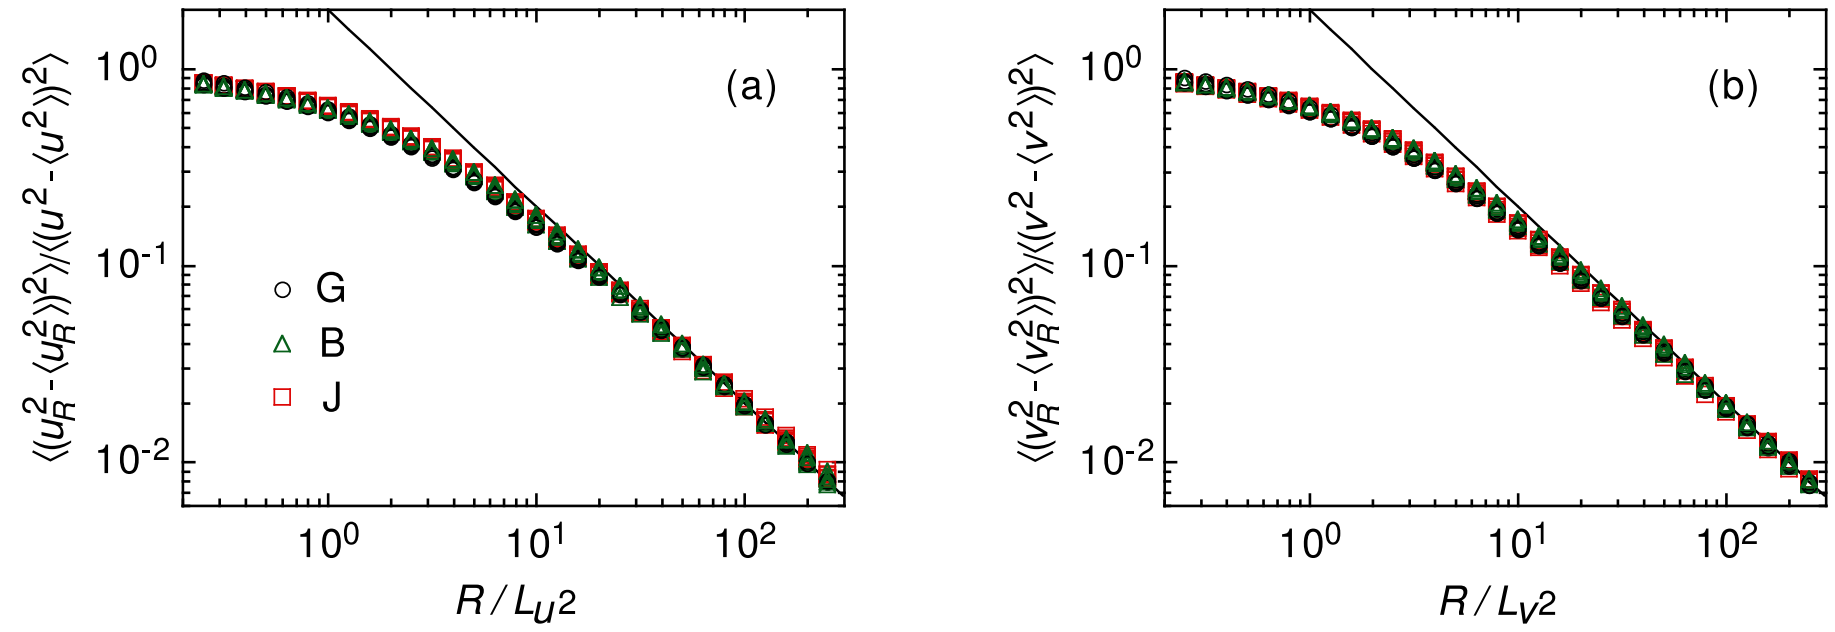

FIG. 3. (color) Normalized variances $\langle(u_R^2-\langle u_R^2\rangle)^2\rangle/\langle(u^2-\langle u^2\rangle)^2\rangle$ as a function of R/L_{u^2} and $\langle(v_R^2-\langle v_R^2\rangle)^2\rangle/\langle(v^2-\langle v^2\rangle)^2\rangle$ as a function of R/L_{v^2} in grid turbulence G1–G5 (circles), boundary layer B1–B6 (triangles), and jet J1–J6 (squares). The solid line indicates the relation of Eq. (4b).

Since Re_λ is on a log scale, it is emphasized in Fig. 2 that C_u, C_{u^2}, C_v, and C_{v^2} are not yet constant but continue to decrease with an increase in Re_λ. The same trend is observed in results of the past works.[8,10–13] Such values of Re_λ are not high enough for complete separation of the large scales from the small scales,[17] so that even the energy-containing eddies undergo some energy dissipation in addition to the energy transfer $\propto \langle u^2\rangle^{3/2}/L$ to the smaller eddies.[14] For convenience to the study in Sec. V, we approximate our results as $C_{u^2} \propto \mathrm{Re}_{\lambda_u}^{-\alpha}$ and $C_{v^2} \propto \mathrm{Re}_{\lambda_v}^{-\alpha}$ with $\alpha = 1/2$ (solid curves). The exponent α is nevertheless not constant and should become negligible at the higher value of the Reynolds number Re_λ.[5–14]

IV. DISCUSSION

Having found a possibility that L_{u^2} could serve as the typical size L of the energy-containing eddies, its reasoning is discussed here. The data record of $u(x)$ is divided into segments with length R. For each of the segments, the center of which is tentatively defined as x_c, the energy u^2 is coarse-grained as

$$u_R^2(x_c) = \frac{1}{R}\int_{-R/2}^{+R/2} u^2(x_c+x)\,dx. \tag{3}$$

If $u(x)$ is homogeneous, the mean square of u_R^2 around its average $\langle u_R^2\rangle = \langle u^2\rangle$ is[18]

$$\langle(u_R^2-\langle u_R^2\rangle)^2\rangle = \frac{2}{R^2}\int_0^R (R-r)\langle[u^2(x+r)-\langle u^2\rangle][u^2(x)-\langle u^2\rangle]\rangle dr, \tag{4a}$$

where $\langle\cdot\rangle$ denotes both the averages over the positions and over the segments. Also if the u^2 correlation is negligible at $r \gg L_{u^2}$, Eqs. (2b) and (4a) yield a relation of $\langle(u_R^2-\langle u_R^2\rangle)^2\rangle$ to the correlation length L_{u^2}

$$\langle(u_R^2-\langle u_R^2\rangle)^2\rangle = \frac{2L_{u^2}}{R}\langle(u^2-\langle u^2\rangle)^2\rangle \quad \text{at} \quad R \gg L_{u^2}. \tag{4b}$$

We relate $\langle(u_R^2-\langle u_R^2\rangle)^2\rangle$ to the typical size L of the energy-containing eddies that have been defined to possess the mean energy $\langle u^2\rangle$. The segment with length R is divided into subsegments with length $nL \ll R$:

$$u_R^2 = \frac{nL}{R}\sum_{m=1}^{R/nL} u_{nL}^2(x_m), \tag{5a}$$

where x_m is the center of the mth subsegment. If $n=1$, the subsegments are just the energy-containing eddies with the mean energy $\langle u_L^2\rangle = \langle u^2\rangle$. The adjacent eddies might be correlated with one another, but such a correlation is negligible if we collect a sufficient number of them, $n = N \gg 1$. Since the mean square of $\sum_{m=1}^{R/NL} u_{NL}^2(x_m)$ around its average is $(R/NL)\langle(u_{NL}^2-\langle u_{NL}^2\rangle)^2\rangle$, we obtain from Eq. (5a) as[19]

$$\langle(u_R^2-\langle u_R^2\rangle)^2\rangle = \frac{NL}{R}\langle(u_{NL}^2-\langle u_{NL}^2\rangle)^2\rangle \quad \text{at} \quad R \gg NL \gg L. \tag{5b}$$

Then, Eqs. (4b) and (5b) yield

$$L_{u^2} = \gamma L \quad \text{for} \quad \gamma = \frac{N\langle (u^2_{NL} - \langle u^2_{NL} \rangle)^2 \rangle}{2\langle (u^2 - \langle u^2 \rangle)^2 \rangle}. \tag{5c}$$

If some fixed values of N and γ are used to determine L, it is proportional to L_{u^2}. The values of N and γ are not determined without a further assumption,[16] but here we discuss them a little more. Figure 3(a) shows $\langle (u^2_R - \langle u^2_R \rangle)^2 \rangle$ in our experiments. They agree with Eq. (4b) at $R \gtrsim 10^2 L_{u^2}$ (solid line). Since Eq. (4b) corresponds to $\gamma = 1$ in Eq. (5c) if we set $R = NL$, $N \simeq 10^2$ is enough for $\gamma \simeq 10^0$ to have $L_{u^2} = \gamma L$ irrespective of the flow. The result also ensures that our estimates of L_{u^2} are reliable. As observed in Fig. 3(b), the same discussion applies to L_{v^2}.

The above discussion does not apply to L_u or L_v. It is true that L_u is related to the variance of the coarse-grained velocity $U_R(x_c) = \int_{-R/2}^{+R/2} u(x_c + x)dx/R$ in a manner similar to Eq. (4b):

$$\langle U^2_R \rangle = \frac{2L_u}{R} \langle u^2 \rangle \quad \text{at} \quad R \gg L_u. \tag{6}$$

However, such a fluctuation of U_R is not related to the typical size L of the energy-containing eddies so far as they are defined to possess the mean energy $\langle u^2 \rangle$. The reason is $\langle u^2 \rangle > \langle U^2_R \rangle$ at any R. We know of no theory that prefers L_u or L_v as the typical size L. They might rather suffer from too large scales (Fig. 1). For isotropic turbulence, Batchelor[3] pointed out that $L_u \propto \int_0^\infty k^{-1}E(k)dk$ does not represent the part of the three-dimensional energy spectrum $E(k)$ that makes the major contribution to the energy $\langle u^2 \rangle \propto \int_0^\infty E(k)dk$.

V. CONCLUDING REMARKS

For the mean rate of energy dissipation written in the form of $\langle \varepsilon \rangle = C\langle u^2 \rangle^{3/2}/L$, it is traditional to define L as the velocity correlation length L_u. However, $C_u = \langle \varepsilon \rangle L_u / \langle u^2 \rangle^{3/2}$ depends on the flow configuration that is to induce the turbulence.[5–13] We have defined L as the correlation length L_{u^2} of the local energy u^2, studied $C_{u^2} = \langle \varepsilon \rangle L_{u^2} / \langle u^2 \rangle^{3/2}$ for several flows, and found a possibility that C_{u^2} does not depend on the flow configuration in Fig. 2. Not L_u but L_{u^2} could be proportional to the typical size L of the energy-containing eddies, so that $\langle u^2 \rangle^{3/2}/L_{u^2}$ is proportional to the rate at which the kinetic energy is removed from those eddies and is eventually dissipated into heat. The energy-containing eddies, if defined to possess the mean energy $\langle u^2 \rangle$, correspond to spatial fluctuations of u^2 represented by L_{u^2} rather than to those of u represented by L_u. This is also the case for the correlation lengths L_v and L_{v^2} of the velocity v and of the local energy v^2.

The lengths L_{u^2} and L_{v^2} describe the variances of u^2_R and v^2_R at large R (Fig. 3). In fact, our past work[16] has demonstrated that L_{u^2} and L_{v^2} describe their entire distributions. We consider L_{u^2} and L_{v^2} as important lengths of the energy-containing scales.

We have an implication from the K-ε model[20] of the numerical simulation, which calculates the eddy viscosity at each position as $\nu_T = cK^2/\langle \varepsilon \rangle$. Here $K^2 = \sum_i \langle v^2_i \rangle /2$ and $\langle \varepsilon \rangle$ are ensemble averages. Defined as $c = \tilde{c}\tilde{C}$ for $\nu_T = \tilde{c}KL$ and $\tilde{C} = \langle \varepsilon \rangle L / K^{3/2}$, the constant $c = 0.09$ applies to various flows. Then, a constant value of $\tilde{c}$ could also apply to the various flows if L could be defined as the correlation length of some local energy so that $\tilde{C}$ is independent of the flow configuration.

The existing discussions often assume that $C = \langle \varepsilon \rangle L / \langle u^2 \rangle^{3/2}$ is independent of the Reynolds number Re_λ.[3,4] They have to be corrected at $\mathrm{Re}_\lambda \lesssim 10^3$, where we observe $C \propto \mathrm{Re}_\lambda^{-\alpha}$ (Fig. 2). The large-scale Reynolds number $\langle u^2 \rangle^{1/2} L/\nu$ is corrected as $\propto \mathrm{Re}_\lambda^{2-\alpha}$. The number of degrees of freedom per unit volume $(L/\eta)^3$, where $\eta = (\nu^3/\langle \varepsilon \rangle)^{1/4}$ is the Kolmogorov length, is corrected as $\propto \mathrm{Re}_\lambda^{9/2-3\alpha}$. Also if, say, Loitsyansky's invariant holds as $\propto \langle u^2 \rangle L^5$ in decaying isotropic turbulence, $\partial_t \langle u^2 \rangle \propto -\langle \varepsilon \rangle$ leads to the decay law $\langle u^2 \rangle \propto t^{-(10-5\alpha)/(7-5\alpha)}$.

Since our data set is not extensive, we have only proposed a possibility that L_{u^2} or L_{v^2} could serve as L. This has to be examined in future with a more extensive set of experimental or numerical data especially at high Reynolds numbers, $\mathrm{Re}_\lambda \gtrsim 10^3$. Although we are not so confident that L_{u^2} or L_{v^2} does serve as L, it is important to persistently explore a suitable definition of L or of the typical size of the energy-containing eddies.

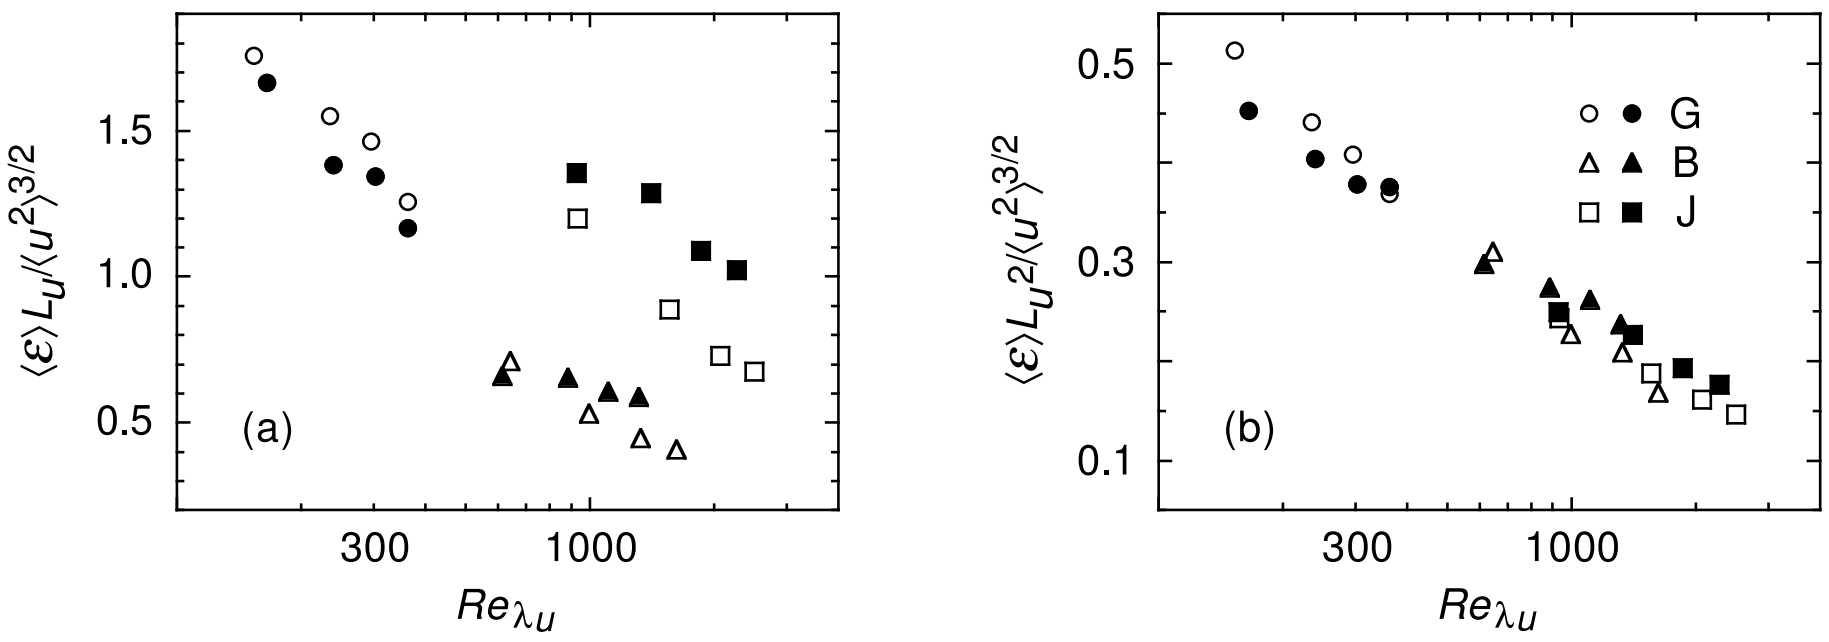

FIG. 4. Dimensionless coefficients $C_u = \langle\varepsilon\rangle L_u/\langle u^2\rangle^{3/2}$ and $C_{u^2} = \langle\varepsilon\rangle L_{u^2}/\langle u^2\rangle^{3/2}$ as a function of Re_{λ_u} in grid turbulence G1–G4 (circles), boundary layer B2–B5 (triangles), and jet J2–J5 (squares). The filled symbols denote data obtained with a single-wire probe. The open symbols denote data obtained with a crossed-wire probe.

ACKNOWLEDGMENTS

This work was supported in part by KAKENHI Grant No. 22540402. The authors are grateful to T. Hara and T. Yagi for assistance in our experiments.

Appendix: SUPPLEMENTARY EXPERIMENTS AND THEIR RESULTS

The spatial resolution of our crossed-wire probe was not high. We used a single-wire probe to conduct supplementary measurements of the streamwise velocity u for the configurations of G1–G4, B2–B5, and J2–J5. The wire parameters were the same as those of the crossed-wire probe. We estimated $\langle\varepsilon\rangle$ as $15\nu\langle(\partial_x u)^2\rangle$. It has been ascertained that the values of $-\langle(\partial_x u)^3\rangle/\langle(\partial_x u)^2\rangle^{3/2}$ agree with those of experimental and numerical data in the literature,[21] 0.5–0.6 for $\mathrm{Re}_\lambda \simeq 10^2$–$10^3$. The values smaller by 0.1–0.3 were obtained with the crossed-wire probe.

Figure 4 compares the results for the single-wire probe (filled symbols) with those for the crossed-wire probe (open symbols). They agree with each other. The exception is $C_u = \langle\varepsilon\rangle L_u/\langle u^2\rangle^{3/2}$ in the jet where L_u is different by 15–25 % (squares). This is because the u velocities measured with the single- and crossed-wire probes were not identical. To the traverse system of the wind tunnel, the probe was set in a different manner. The contamination with the v and w velocities was also different (see Sec. II B). Since the alignment of the sequences of $C_{u^2} = \langle\varepsilon\rangle L_{u^2}/\langle u^2\rangle^{3/2}$ is again observed in Fig. 4(b), the spatial resolution of our crossed-wire probe is not serious to the estimates of $\langle\varepsilon\rangle$, albeit serious to those of $\langle\varepsilon^2\rangle$, $\langle\varepsilon^3\rangle$, and so on, and hence is not serious to our conclusion that C_{u^2} is independent of the flow configuration at least as an approximation.

[1] G. I. Taylor, "Statistical theory of turbulence," Proc. R. Soc. Lond. A **151,** 421 (1935).

[2] H. L. Dryden, "A review of the statistical theory of turbulence," Quart. Appl. Math. **1,** 7 (1943).

[3] G. K. Batchelor, *The Theory of Homogeneous Turbulence* (Cambridge University Press, Cambridge, 1953).

[4] L. D. Landau and E. M. Lifshitz, *Fluid Mechanics* (Pergamon, London, 1959).

[5] K. R. Sreenivasan, "On the scaling of the turbulence energy dissipation rate," Phys. Fluids **27,** 1048 (1984).

[6] K. R. Sreenivasan, "The energy dissipation in turbulent shear flows," in *Developments in Fluid Dynamics and Aerospace Engineering,* edited by S. M. Deshpande, A. Prabhu, K. R. Sreenivasan, and P. R. Viswanath (Interline, Bangalore, 1995), p. 159.

[7] K. R. Sreenivasan, "An update on the energy dissipation rate in isotropic turbulence," Phys. Fluids **10,** 528 (1998).

[8] R. A. Antonia and B. R. Pearson, "Effect of initial conditions on the mean energy dissipation rate and the scaling exponent," Phys. Rev. E **62,** 8086 (2000).

[9] B. R. Pearson, P.-Å. Krogstad, and W. van de Water, "Measurements of the turbulent energy dissipation rate," Phys. Fluids **14,** 1288 (2002).

[10] P. Burattini, P. Lavoie, and R. A. Antonia, "On the normalized turbulent energy dissipation rate," Phys. Fluids **17,** 098103 (2005).

[11] N. Mazellier and J. C. Vassilicos, "The turbulence dissipation constant is not universal because of its universal dependence on large-scale flow topology," Phys. Fluids **20,** 015101 (2008).

[12] S. Goto and J. C. Vassilicos, "The dissipation rate coefficient of turbulence is not universal and depends on the internal stagnation point structure," Phys. Fluids **21,** 035104 (2009).

[13]Y. Kaneda, T. Ishihara, M. Yokokawa, K. Itakura, and A. Uno, “Energy dissipation rate and energy spectrum in high resolution direct numerical simulations of turbulence in a periodic box,” Phys. Fluids **15,** L21 (2003).

[14]W. D. McComb, A. Berera, M. Salewski, and S. Yoffe, “Taylor’s (1935) dissipation surrogate reinterpreted,” Phys. Fluids **22,** 061704 (2010).

[15]H. Mouri, A. Hori, and M. Takaoka, “Large-scale lognormal fluctuations in turbulence velocity fields,” Phys. Fluids **21,** 065107 (2009).

[16]H. Mouri, A. Hori, Y. Kawashima, and K. Hashimoto, “Statistical mechanics and large-scale velocity fluctuations of turbulence,” Phys. Fluids **23,** 125110 (2011).

[17]R. A. Antonia and P. Burattini, “Approach to the 4/5 law in homogeneous isotropic turbulence,” J. Fluid Mech. **550,** 175 (2006).

[18]S. O. Rice, “Mathematical analysis of random noise,” in *Selected Papers on Noise and Stochastic Processes,* edited by N. Wax (Dover, New York, 1954), p. 133.

[19]H. Mouri, M. Takaoka, A. Hori, and Y. Kawashima, “On Landau’s prediction for large-scale fluctuation of turbulence energy dissipation,” Phys. Fluids **18,** 015103 (2006).

[20]B. E. Launder and D. B. Spalding, “The numerical computation of turbulent flows,” Comp. Meth. Appl. Mech. Eng. **3,** 269 (1974).

[21]K. R. Sreenivasan and R. A. Antonia, “The phenomenology of small-scale turbulence,” Annu. Rev. Fluid Mech. **29,** 435 (1997).